


ORWAK 3410

Orwak 3410 offers effective baling of large volumes of recyclable packaging in a wide variety of different environments. It is the optimal choice for both cardboard and plastic. Furthermore, with a sound emission of only 59.5 dB, it is the most soft-spoken baler in the range!

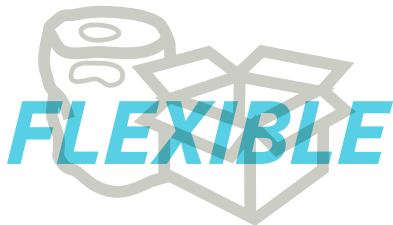

MORE PRODUCTIVE USE OF TIME

Less time spent on waste handling, more time devoted to your core activities.

VOLUME REDUCTION

More compaction = less waste volume to transport for recycling or disposal. Fewer transports required results in lower transportation costs and reduced CO₂ emissions.

MORE SPACE

Our baler rapidly minimizes the space the waste takes up, keeping aisles and passageways free and tidy.



ORWAK 3410

Simple baling of big volumes

HIGH CAPACITY

A high capacity baler for large volumes of cardboard and plastic.

DIMENSIONS FOR TIGHT FLOOR SPACE

- less than 1,5 sq.m.

EFFECTIVE COMPACTION

The long piston stroke gives highly compacted bales!



ORWAK 3410 IS OPTIMIZED FOR:

PAPER

- + Cardboard
- + Shredded
- + Paper sacks

PLASTIC FOIL

- + Shrink film
- + Plastic bags

SILENT OPERATION CONTRIBUTES TO A BETTER WORKING ENVIRONMENT

Due to a silent type of hydraulics, the sound emission is low, which contributes to improving the working environment for the employees and is an important feature if the baler is installed close to customers.

SWITCH BETWEEN LP AND HP

Compacting cardboard or plastic foil? A switch conveniently located on the side of the machine makes it simple to alter the setting from High Pressure for cardboard to Low Pressure for plastic foil.

BALE INDICATOR

A bale indicator alerts you when the machine has reached its capacity.


SAFE DOOR-OPENING

"The latch and wheel" locking system on the lower door allows the operator to gradually open the door in a controlled way even when compacting expanding materials.

DIMENSIONS AND SPECIFICATIONS

Dimensions					
A	B	C	D	E	F*
2962 (2794) mm	1590 mm	1103 mm	2270 mm	1107 mm	2150 mm

Energy consumption	
STANDBY MODE	MAXIMUM OPERATION ONE HOUR
2.7 W / H	1200 W / H



WEIGHT (MACHINE) TOTAL: 1310 KG

*Transport Height
 † Option

Technical specifications							
LOADING APERTURE	CYCLE TIME	PRESS FORCE	BALE SIZE	BALE WEIGHT	NOISE LEVEL	PROTECTION CLASS	OPERATING POWER
Width: 1200 mm Height: 554 mm	35 secs	24 ton, 240 kN	Width: 1200 mm Depth: 800 mm Height: 1000 mm	Cardboard: Up to 400 kg Plastic: Up to 450 kg	59.5 db (A)	IP 55	3-phase 3x400 V, 50 Hz



TOMRA Compaction AB

Box 58, SE-576 22 Sävsjö, Sweden
 Tel: +46 382-157 00
 Fax: +46 382-106 07
 E-mail: info.compaction@tomra.com
www.tomracompaction.com

We reserve the right to make changes to specifications without prior notice.
 Bale/bag/bin weights are dependent upon material type.